



SINGLE BAND, DUAL POLARISED ANTENNA UMTS XP 65/15/2 OR 4 TYPE: 2204


- ❑ SINGLE-BAND 3G APPLICATIONS
- ❑ ULTRA LOW-PROFILE RADOME
- ❑ SIDELOBE SUPPRESSION

The '3G Series' of panel antennas from Racal Antennas have been designed to easily facilitate the installation of Third Generation cellular infrastructure into new or existing networks. A number of models provide variations in both gain and fixed electrical downtilt to exactly suit the required cell coverage. Slimline radomes reduce visual impact & provide an easily installed, robust enclosure. An extremely low component count and one-piece PCB result in consistently high product quality and reliability, having an excellent intermodulation performance. The mounting brackets enable Tilt or Pan + Tilt options. Two connectors are provided on the base of the unit.



TECHNICAL SPECIFICATION

Frequency	1900 - 2170MHz
Gain	15 dBi
VSWR	1.4:1 max
Horizontal Beamwidth	65°
Vertical Beamwidth	14°
Fixed Electrical Downtilt	2° or 4°
Upper Sidelobe Suppression	>18dB
Front-to-Back Ratio	>30 dB @ ± 180° azimuth
Isolation	30dB
Power Rating	200W
Connectors	2 x 7/16" DIN (socket at bottom)
Dimensions (LxWxD)	704 x 142 x 43 mm
Operational Wind Speed	45m/s (160 Km/h)
Survival Wind Speed	56m/s (200 Km/h)
Max Wind Loading (Front)	132 N @ 45m/s
Weight	2.1kg
Temperature Range	- 40°C to + 70°C
Bracket Options	Tilt ± 10°

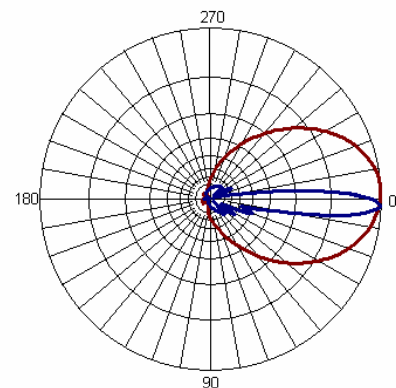

2 degree downtilt plot shown

INOTEK ANTENNAS LTD

54, Ashdown Road, Chandler's Ford, Eastleigh, Hampshire, SO53 5QJ United Kingdom

Tel: +44 (0) 2380 254289, Fax: +44 (0) 191 3920133, email: sales@inotekantennas.com, www.inotekantennas.com

Inotek Antennas reserve the right to vary in detail from the description and specification in this publication. Issue: 04/07